


SECOIA® 1501

Water-based bio-sourced alkyd

Architectural applications

		WB SA	SECOIA® 1501
PAINT PROPERTIES	Opacity	☆☆☆	☆☆☆
	Interaction w/ thickeners	☆	☆☆
	Wet scrub resistance	☆☆☆	☆☆☆
	Low VOC / SVOC	☆	☆☆☆
	Open time	☆☆	☆☆☆




*Based on C content measured according to EN 16640



Lower easily the carbon footprint of your coatings:

- by advantageously **replacing** traditional alkyd binders
- by **substituting** petro-based binders
- while **holding** your coatings' performance & formulation

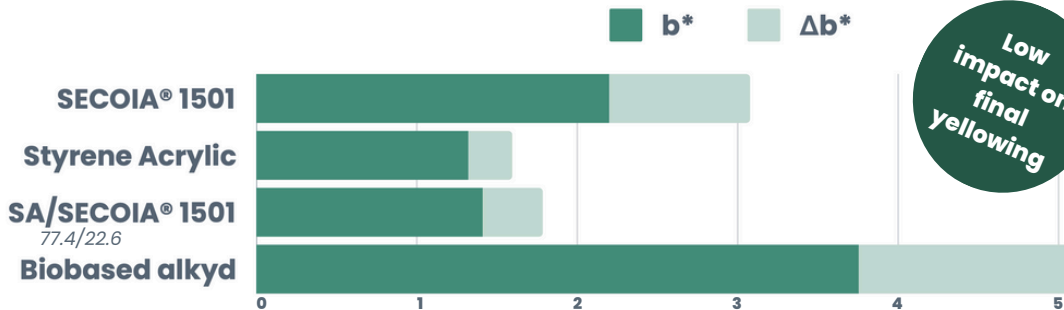


Low impact on final yellowing

Matte wall paint

After 28 days
100 μm wet film

Versatile binder:

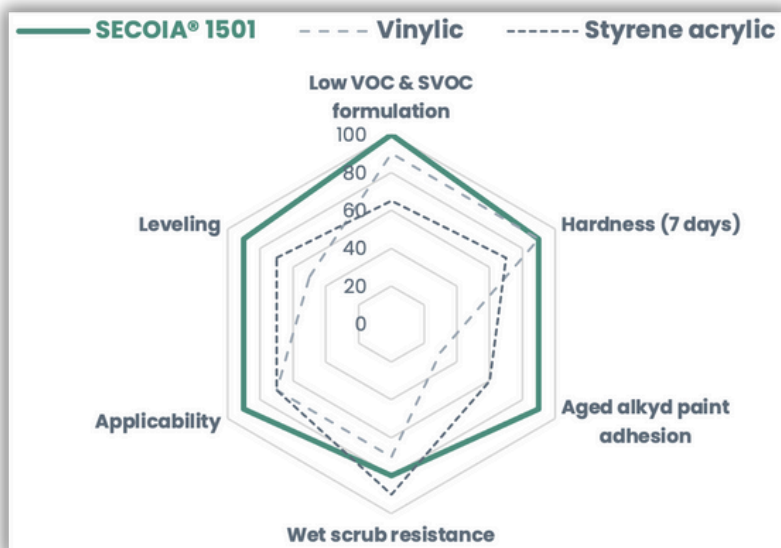

Compliant with environmental labels

